
Exploring Interactions with Smart Windows for Sunlight Control

Patrick Bader

University of Stuttgart
Stuttgart, Germany
patrick.bader@vis.uni-stuttgart.de

Huy Viet Le

University of Stuttgart
Stuttgart, Germany
huy.le@vis.uni-stuttgart.de

Julian Strotzer

University of Stuttgart
Stuttgart, Germany

Niels Henze

University of Stuttgart
Stuttgart, Germany
niels.henze@vis.uni-stuttgart.de

Abstract

Window facades play an increasingly important role in modern architecture. Regular shutters and blinds allow only coarse control over the sunlight coming through windows. Smart windows using see-through displays can be controlled on a per-pixel basis and thereby have the potential of fine-grained control. In this paper, we explore future interaction with such smart windows and conducted an elicitation study with 16 potential users. We provide both a mid-air gesture set and a smartphone interface to define regions for glare protection and brightness control. The study was conducted on a working $1.6 \times 2.6 m$ smart window prototype with 130×144 individually switchable pixels.

Author Keywords

Smart windows; gesture elicitation; guessability; user-defined; mid-air

ACM Classification Keywords

H.5.2 [User Interfaces]: Interaction Styles.

Introduction and Background

Windows play a central role and make up large parts of modern building facades. Thus, sun protection becomes an increasingly important aspect of user comfort in such buildings and influences room climate. Traditional glare protection systems like window blinds or shutters use mechanical

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the Owner/Author. Copyright is held by the owner/author(s).
CHI'17 Extended Abstracts, May 06–11, 2017, Denver, CO, USA.
ACM 978-1-4503-4656-6/17/05.
<http://dx.doi.org/10.1145/3027063.3053242>

components, which are often controlled manually to block sunlight. From a technical perspective, such systems are prone to failure due to environmental influences, like strong winds, and due to wear-out. Furthermore, users have to decide between brightness in the room and glare protection.

Recently, various applications of see-through displays have gained interest by the research community. See-through displays have been used for layered 3d display devices [3], back-of-device interaction [2] and augmented reality [8]. Also, see-through liquid-crystal (LC) panels can be integrated into window double glazing, see Figure 1. Such smart windows allow users fine-grained control over the shading of arbitrary parts of the window. With short response times compared to e.g. shutters, they can directly react to environmental changes and decouple glare protection from brightness control.

Smart Windows

Previous work on smart windows focused on adaptation to environmental changes in the context of climate control and sustainable living. The smart window controls the amount of sunlight and heat which is propagated into a building [4, 9] on a per-tile basis. In this way, user comfort is increased and energy consumption for climate control is reduced.

Rekimoto [11] presented two use cases for interacting with smart windows. In *real-world pixelization*, users' location is tracked and sight on specific body parts is blocked. In *programmable shadows*, users can define regions in the room for which the smart window casts shadows based on the sun's location. However, previous work does not define how interaction with smart windows is realized. As people typically interact with windows located in the same room and may be spontaneous, interaction can be realized through a gesture interface.

Gesture Elicitation

Gesture interfaces enable interaction at short distances and have gained increasing interest since consumer devices like the Kinect or Wii with support for gesture control hit the market. Wobbrock et al. [16] presented a methodology for deriving gestures from users in *elicitation studies*. In these studies, users are shown the effects of gestures (called *referents*) and are asked to come up with corresponding gestures that would cause the effect. Gestures are assigned to each referent based on *agreement*. The notion of agreement was extended and formalized in more recent work [14] which allows statistical tests to be performed on *agreement*.

Gesture elicitation has been used in various fields including mobile interaction [12], augmented reality [10], smart-watches [1] and music playback [7]. In the context of large displays, gesture sets were elicited for TV control [5, 13]. Wittorf et al. [15] elicited gestures for wall-displays and found that they tend to be more physically-based and larger for large displays whereas hand posture is less important. Referents were largely related to manipulation tasks (13/25) in the context of application windows. Spontaneous interactions with smart windows in homes which may not be perceived as displays by users have not been covered.

Summary

Previous work investigated application scenarios for see-through displays including smart windows. Gestures have been elicited for various devices ranging from smart watches to large displays. However, interfaces for smart window interactions are largely unexplored. We derive a mid-air gesture set for glare protection and a corresponding smart-phone interface from an elicitation study. The former for spontaneous and the latter for distant interaction. The study was conducted on a functional $1.6 \times 2.6 \text{ m}$ smart window prototype with 18720 individually controllable segments.



Figure 1: View of the smart window prototype with some transparent and some opaque regions.

Referents	
Creation	
R1	Create
R2	Delete
R3	Select
R4	Deselect
R5	Move
Size	
R6	Enlarge Top
R7	Shrink Top
R8	Enlarge Bottom
R9	Shrink Bottom
R10	Enlarge Left
R11	Shrink Left
R12	Enlarge Right
R13	Shrink Right
R14	Scale Up
R15	Scale Down
Transparency	
R16	Increase Transparency
R17	Decrease Transparency
R18	Window Opaque
R19	Window Transparent
Gesture Delimiter	
R20	Start Detection
R21	Stop Detection

Table 1: Overview of referents for both interfaces. Each referent is depicted in its initial state (left icon) and target state (right icon). Grey arrows and colors (red) are for illustration purposes and were not visible to the participants.

Elicitation Study

We conducted a study to investigate two complementary explicit interaction modalities for defining and manipulating rectangular sunlight blocking regions on smart windows. First, a gesture interface intended for spontaneous interactions in front of the window. Second, a smartphone interface for interactions where the user does not have to be located directly next to the window. We followed the method for elicitation studies introduced by Wobbrock et al. [16] and used the metrics and AGATE toolkit for data analysis introduced by Vatavu et al. [14] for both interfaces.

Participants

Sixteen participants (14 males, 1 female and 1 unspecified), ranging in age from 21 to 33 years ($M=26$, $SD=2.5$) volunteered in our study. One participant was left handed. We obtained informed consent from each participant.

Apparatus

For the study, we used the facade test facility, a two-story timber building at our local university. It includes four test rooms, each $2.00 \times 4.20 \times 2.70 m$ large and has a glazed south facade. The study took place in one of these rooms which has a $1.6 \times 2.6 m$ LCD-based smart window prototype installed. Its resolution is 130×144 pixels in total and each pixel can either be set transparent or opaque, see Figure 1. A detailed description of the facility and the smart window is given by Haase et al. [6]. We used the smart window to show the respective window state for the referents¹ so users were able to look through a real smart window during the study. Users' gestures were recorded with a Kinect v2 depth sensor at 30 frames per second which was located in front of the window.

¹Individual actions are called *referent* in gesture elicitation studies.

Referents

We defined 21 basic actions which users can perform to manipulate sunlight blocking regions on the window, see Table 1. They represent basic actions that are either *creation*, *size* or *transparency* related. The gesture interface consists of another category called *gesture delimiter* for enabling and disabling gesture detection to prevent unintended input.

Design & Procedure

We used a within-subjects design and asked participants to perform gestures and make suggestions for the smartphone interface. The study took 45 minutes on average and participants received some sweets. First we briefed participants on the topic and on the procedure and demonstrated the basic operation of the smart window. Then participants filled out a consent form and a background questionnaire.

We counterbalanced the order of the interaction approaches which participants used first. Referents were shown in randomized order. However, referents in the *gesture delimiter* category were always shown last and only for the gesture interface. This eliminated priming participants on technical limitations for the other gestures.

For each referent, the initial state of the system before the action was shown. Participants were told which action the system will perform. Then, the resulting state was shown, see Table 1. Transitions between the states were not shown to remove bias towards gestures that mimic specific transitions. For the gesture interface, participants were asked to perform the actual gesture. In case of the graphical smartphone interface, participants were asked how they would perform each action. They were provided with pictures of all input controls available on Android on a sheet of paper. Participants could answer verbally (which we audio recorded) or draw sketches on paper. The study closed with a questionnaire about their overall opinion on such systems.

Taxonomy of Interaction	
General	
Nature	Physical
	Symbolic
	Metaphorical
	Abstract
Flow	Discrete
	Continuous
Binding	Absolute
	Relative
	Arbitrary
Axes of Motion	Stationary
	Horizontal
	Longitudinal
	Saggital
	Compound
Mid-Air Gestures	
Hands	Single
	Both
Smartphone Actions	
Fingers	Single
	Multiple
Target	Preview
	UI-Component

Table 2: Taxonomy of interaction based on 104 mid-air gestures and 72 smartphone actions. General categories apply to both interfaces.

Results

Participants performed a total of 104 distinct gestures for the gesture interface. For the smartphone interface, 72 distinct interactions were described. None of these were mid-air gestures performed with the phone. We report on agreement between participants and present a taxonomy for both interfaces.

Taxonomy

We categorized actions performed with both interfaces using a unified taxonomy as shown in Table 2. This taxonomy combines and extends two taxonomies from previous work on surface computing [16] and mid-air gestures for people that are blind [5]. It defines four dimensions which apply to both interfaces and three dimensions which apply to either interface. We directly applied the dimensions *nature*, *flow* [16] and *axes of motion* [5] from previous work.

We redefined the *binding* category which describes how a gesture or action relates to its referent. If the *binding* is *absolute*, changes in hand/finger position during the action directly map to changes on the window e.g. the user grabs the right edge of a region with one hand and moves the hand to the right, the edge will move in the same direction as if the user is actually holding the edge. In contrast, if the *binding* is *relative* changes in hand/finger position only indirectly map to changes on the window e.g. a user increases transparency by performing a clockwise rotation with her hand. Actions which do not relate hand/finger motion to changes on the window are categorized as *arbitrary* actions. A user deletes a region by waving his hand, for example.

We added two similar dimensions for the mid-air gestures and smartphone actions regarding number of *hands* or *fingers* used. One-handed gestures may be performed in encumbered situations and may also allow the combinations

of two gestures at the same time. For the smartphone actions, single finger interactions are easier to perform when holding the phone one-handed.

For the smartphone action set, another dimension regarding the *target* on the touchscreen was included. Actions can be performed on a *preview* of the window on the smartphone display. These actions are typically surface gestures. Alternatively, users can use a default *UI-component*, like a button or slider to perform an action.

Categorization of Mid-Air Gestures

Mid-air gestures were mostly performed with *both hands* (57.7%) and *flow* was continuous (67.3%). The *nature* of the majority of all gestures was *physical* (65.4%) especially for the size related referents (93.8%). *Symbolic* gestures were only used to *start* or *stop detection* (21.4%). Other gestures for *delimiter* were either *abstract* (50.0%) or *metaphorical* (28.6%). Number of hands used was highly related to whether the binding was *relative* and *absolute* ($\chi^2(2, N = 82) = 30.03, p < .001$). Gestures with relative binding were primarily performed with both hands (86.7%) whereas gestures with absolute binding were performed with one hand (73.0%)

Categorization of Smartphone Interaction

In contrast to the number of hands used for mid-air gestures, most actions for the smartphone interface were performed with a *single* finger (70.8%) and their binding was mostly *absolute* (58.3%). There was no clear preference in the *nature* between physical (29.2%), symbolic (22.2%), metaphoric (33.3%) and abstract (15.3%). However, *flow* of actions was primarily *continuous* (70.8%). We found statistically significant relations between *target* and *flow* ($\chi^2(2, N = 72) = 27.45, p < .001$). Participants used *UI-components* (66.7%) primarily for *discrete* actions and the *preview* (92.2%) for *continuous* actions.

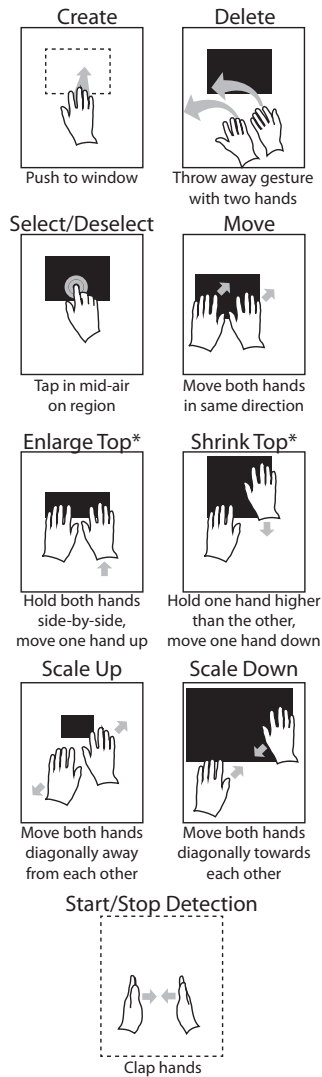


Figure 3: Gesture set derived from elicitation study.

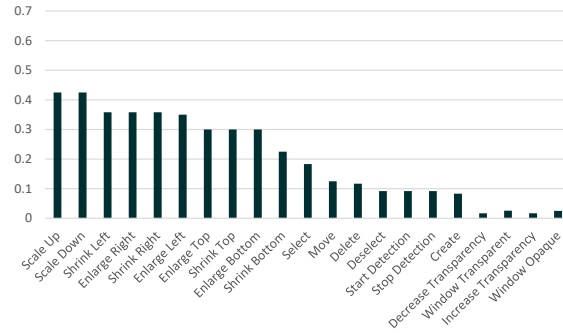


Figure 2: Agreement rates for mid-air gestures.

Agreement Analysis

We analyzed agreement based on the *agreement rate* \mathcal{AR} introduced by Vatavu et al. [14]. The overall agreement was $\mathcal{AR} = .203$ for mid-air gestures and $\mathcal{AR} = .439$ for the smartphone interface. Individual agreement rates for mid-air gestures are shown in Figure 2 and Figure 4 shows actions for the smartphone interface. Referents which were *size* related achieved comparatively high agreement rates for the gesture $\mathcal{AR} = .340$ and smartphone interface $\mathcal{AR} = .535$. Participants had difficulties to come up with *transparency* related gestures, therefore agreement was low.

A Mid-Air Gesture Set for Smart Windows

We derived a gesture set based on users' agreements, see Figure 3. We selected the gestures with highest agreement for each referent. All but three gestures (*create*, *select*, *deselect*) were performed with two hands and participants held their hands open while performing gestures. Participants "pushed" towards the window (25%) to *create* new regions and "threw the region away" (25%) to *delete* it. Most participants (63%) moved both hands diagonally apart or towards each other to *scale* regions *up* and *down*.

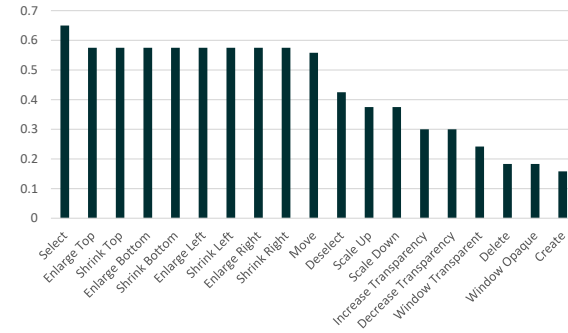


Figure 4: Agreement rates for smartphone interface actions.

To enlarge a region in one directions, participants held both hands in front of them and moved only one hand away from the other. Participants performed inverse gestures to shrink regions, starting with both hands apart and moving one towards the other. We illustrate only the enlarge and shrink gestures for the top edge of a region in Figure 3. Gestures in other directions were performed analogously.

Most agreement (31%) for *start* and *stop detection* was achieved with the clap gesture. Referents in the *transparency* category did not have statistically significant agreement and were thus excluded from the gesture set.

A Smartphone Interface for Smart Windows

We derived a set of actions for a graphical smartphone interface also based on maximum agreement per referent. The action set is depicted in Figure 5. Five participants chose a pinch out gesture to *create* new regions and most participants (75%) dragged a region out of the preview to *delete* it. Similar to the gesture set, *selection* was done by tapping on a region (81%). However *deselecting* a region was done by tapping on a free area (63%).

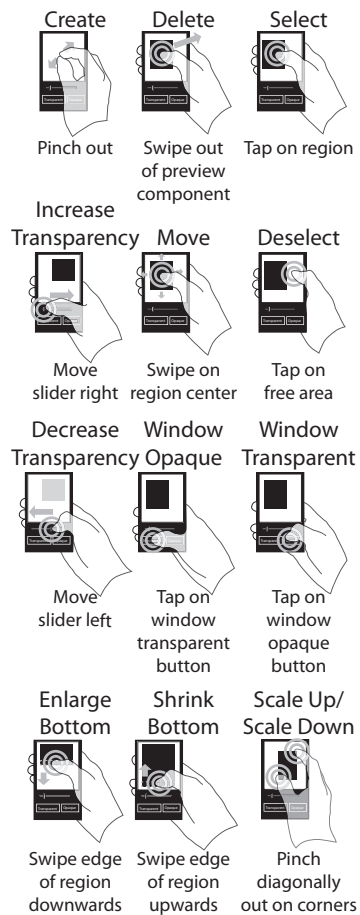


Figure 5: Smartphone interface derived from elicitation study.

Most participants (75 %) swiped to either *move* a region or *enlarge/shrink* the respective edge of a region. Only *enlarging* and *shrinking* a region at the bottom is depicted in Figure 5, other directions were changed analogously. To *scale up* or *down* uniformly, participants (63 %) pinched opposite corners with two fingers. *Create* and *scale up/down* were the only actions which were performed with two fingers simultaneously. Participants chose *UI-components* for all *transparency* related referents.

Discussion

The smartphone interface achieved a higher overall agreement compared to the gesture interface. There are two reasons for this: Users are accustomed to using smartphones in their daily lives with specific guidelines for the user interface. Mid-air gestures offer more degrees of freedom and thus more variation in actions can be expected. Yet, participants had comparatively high agreement on size related referents with both modalities. This suggests users have a clear mental model of how to change size of 2d objects.

Mid-air gestures for the *scale up* and *down* referents received highest agreement whereas agreement for the smartphone interface was only average. One reason could be that users seldom perform two finger gestures as zooming can mostly be done by double tapping.

We had to drop all transparency related referents from the gesture set due to insufficient agreement among participants. One reason for this could be that transparency is a more abstract concept than physically moving objects and users have no clear mental model for it. Furthermore, users typically do not adjust transparency outside graphics software. Results from the smartphone interface support this assumption as all transparency related actions are represented via abstract *UI-components* like sliders and buttons.

The mid-air gesture set mostly consists of two-handed gestures with relative binding. In contrast, the graphical smartphone interface is usable with one hand and binding is absolute. Participants also did not focus on specific hand postures and some participants performed corresponding gestures with alternating hand postures. This means that an implementation can neglect hand posture for the majority of gestures. Not only does this simplify the implementation it also allows to perform gestures when holding objects.

Conclusion & Future Work

In this paper we present the idea of controlling glare protection for smart windows using mid-air gestures or smartphones. We derived a set of mid-air gestures and a graphical smartphone interface for basic smart window interactions from an elicitation study. This work is a first step towards the vision of houses where architecture, especially window locations and shape, may be defined interactively by inhabitants and is not defined statically by an architect.

In a next step, we plan to perform studies to evaluate our gesture set and to receive feedback on users' perception and usability. Our system may also be extended to allow more precise control over the smart window and increase flexibility by supporting free-form regions and interacting with objects in the room for indirect glare protection.

Acknowledgements

This work has partly been funded by the Baden-Württemberg Stiftung gGmbH, Germany in the program "Nachhaltiges Bauen" (sustainable building). The hardware we used has been funded by the Federal Institute for Research on Building, Urban Affairs and Spatial Development, Germany, in the project "TN-Technologie für den Einsatz in Architekturverglasungen" (TN-technologies for use in architecture glazing), grant number: SWD -10.08.18.7-13.26.

References

- [1] Shaikh Shawon Arefin Shimon, Courtney Lutton, Zichun Xu, Sarah Morrison-Smith, Christina Boucher, and Jaime Ruiz. 2016. Exploring Non-Touchscreen Gestures for Smartwatches. In *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems (CHI '16)*. ACM, New York, NY, USA, 3822–3833. DOI : <http://dx.doi.org/10.1145/2858036.2858385>
- [2] Patrick Bader, Valentin Schwind, Niels Henze, Stefan Schneegass, Nora Broy, and Albrecht Schmidt. 2014. Design and Evaluation of a Layered Hand-held 3D Display with Touch-Sensitive Front and Back. In *Proceedings of the 8th Nordic Conference on Human-Computer Interaction: Fun, Fast, Foundational (NordiCHI '14)*. ACM, New York, NY, USA, 315–318. DOI : <http://dx.doi.org/10.1145/2639189.2639257>
- [3] Peter C. Barnum, Srinivasa G. Narasimhan, and Takeo Kanade. 2010. A Multi-Layered Display with Water Drops. In *ACM SIGGRAPH 2010 Papers (SIGGRAPH '10)*. ACM, New York, NY, USA, 76:1–76:7. DOI : <http://dx.doi.org/10.1145/1833349.1778813>
- [4] Daniel Cardoso, Avni Argun, Carlos A. Rocha, and Jose Gonzalez. 2009. Drawing Transparencies: 'Responsible Responsiveness' in Spaces Through Organic Electrochromism. In *Computation: The New Realm of Architectural Design (eCAADe)*. Istanbul (Turkey), 83–88.
- [5] Nem Khan Dim, Chaklam Silpasuwanchai, Sayan Sarcar, and Xiangshi Ren. 2016. Designing Mid-Air TV Gestures for Blind People Using User- and Choice-Based Elicitation Approaches. In *Proceedings of the 2016 ACM Conference on Designing Interactive Systems (DIS '16)*. ACM, New York, NY, USA, 204–214. DOI : <http://dx.doi.org/10.1145/2901790.2901834>
- [6] Walter Haase, Marzena Husser, and Werner Sobek. 2016. Potentiale Strukturierter, Schaltbarer Verglasungen. In *Glasbau 2016*. Wilhelm Ernst & Sohn, Berlin, Germany, 293–307.
- [7] Niels Henze, Andreas Löcken, Susanne Boll, Tobias Hesselmann, and Martin Pielot. 2010. Free-Hand Gestures for Music Playback: Deriving Gestures with a User-Centred Process. In *Proceedings of the 9th International Conference on Mobile and Ubiquitous Multimedia (MUM '10)*. ACM, New York, NY, USA, 16:1–16:10. DOI : <http://dx.doi.org/10.1145/1899475.1899491>
- [8] Juan David Hincapié-Ramos, Sophie Roscher, Wolfgang Büschel, Ulrike Kister, Raimund Dachsel, and Pourang Irani. 2014. cAR: Contact Augmented Reality with Transparent-Display Mobile Devices. In *Proceedings of the 3rd International Symposium on Pervasive Displays*. Copenhagen, Denmark. 00000.
- [9] Sotirios D. Kotsopoulos, Leonardo Giusti, and Federico Casalegno. 2014. Designing Synchronous Interactions for the Fenestration System of a Prototype Sustainable Dwelling. In *Proceedings of the 7th International Conference of the Arab Society for Computer Aided Architectural Design (ASCAAD2014)*, Effat University, Saudi Arabia, March. 291–301.
- [10] Thammathip Piumsomboon, Adrian Clark, Mark Billingham, and Andy Cockburn. 2013. User-Defined Gestures for Augmented Reality. In *Human-Computer Interaction – INTERACT 2013*, Paula Kotzé, Gary Marsden, Gitte Lindgaard, Janet Wesson, and Marco Winckler (Eds.). Number 8118 in Lecture Notes in Computer Science. Springer Berlin Heidelberg, 282–299. DOI : http://dx.doi.org/10.1007/978-3-642-40480-1_18

- [11] Jun Rekimoto. 2012. Squama: Modular Visibility Control of Walls and Windows for Programmable Physical Architectures. In *Proceedings of the International Working Conference on Advanced Visual Interfaces (AVI '12)*. ACM, New York, NY, USA, 168–171. DOI : <http://dx.doi.org/10.1145/2254556.2254587>
- [12] Jaime Ruiz, Yang Li, and Edward Lank. 2011. User-Defined Motion Gestures for Mobile Interaction. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '11)*. ACM, New York, NY, USA, 197–206. DOI : <http://dx.doi.org/10.1145/1978942.1978971>
- [13] Radu-Daniel Vatavu. 2012. User-Defined Gestures for Free-Hand TV Control. In *Proceedings of the 10th European Conference on Interactive Tv and Video (EuroITV '12)*. ACM, New York, NY, USA, 45–48. DOI : <http://dx.doi.org/10.1145/2325616.2325626>
- [14] Radu-Daniel Vatavu and Jacob O. Wobbrock. 2015. Formalizing Agreement Analysis for Elicitation Studies: New Measures, Significance Test, and Toolkit. In *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems (CHI '15)*. ACM, New York, NY, USA, 1325–1334. DOI : <http://dx.doi.org/10.1145/2702123.2702223>
- [15] Markus L. Wittorf and Mikkel Rønne Jakobsen. 2016. Eliciting Mid-Air Gestures for Wall-Display Interaction. In *Proceedings of the 9th Nordic Conference on Human-Computer Interaction: Game-Changing Design (NordiCHI '16)*. ACM, New York, NY, USA. DOI : <http://dx.doi.org/10.1145/2971485.2971503>
- [16] Jacob O. Wobbrock, Meredith Ringel Morris, and Andrew D. Wilson. 2009. User-Defined Gestures for Surface Computing. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '09)*. ACM, New York, NY, USA, 1083–1092. DOI : <http://dx.doi.org/10.1145/1518701.1518866>